


# HYPERTECH DYNAMOMETER TEST RESULTS

2007-2008 GM Silverado and Sierra 2500/3500HD  
6.6L V8 Turbo Diesel Duramax Engine (LMM)

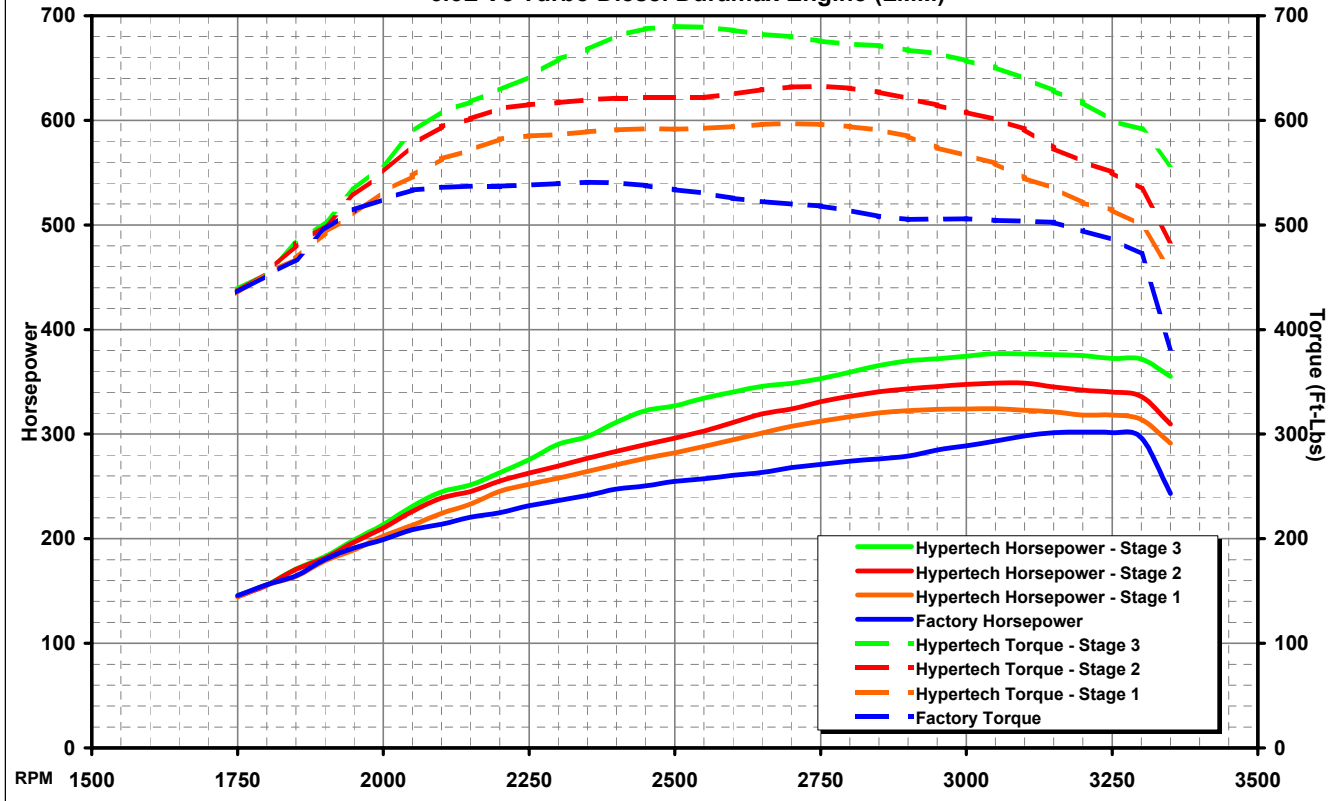

	MAX Horsepower Gain	MAX Torque Gain	MAX Horsepower	MAX Torque
Hypertech Stage 3	+91 HP @ 2900 RPM	+164 Ft-Lbs @ 2850 RPM	377 HP @ 3050 RPM	690 Ft-Lbs @ 2500 RPM
Hypertech Stage 2	+64 HP @ 2900 RPM	+119 Ft-Lbs @ 2850 RPM	349 HP @ 3050 RPM	633 Ft-Lbs @ 2750 RPM
Hypertech Stage 1	+44 HP @ 2850 RPM	+83 Ft-Lbs @ 2850 RPM	324 HP @ 3050 RPM	597 Ft-Lbs @ 2700 RPM
Factory	—	—	302 HP @ 3200 RPM	541 Ft-Lbs @ 2350 RPM

RPM	Horsepower					
	Factory	Hypertech Stage 1		Hypertech Stage 2		Hypertech Stage 3
	HP	HP	(Gain)	HP	(Gain)	HP (Gain)
1750	146	145	-(+1)	145	-(+1)	146 (+0)
2000	199	202	(+3)	210	(+11)	213 (+14)
2250	232	252	(+20)	263	(+31)	276 (+44)
2350	241	264	(+23)	277	(+36)	298 (+57)
2500	255	282	(+27)	296	(+41)	327 (+72)
2700	268	307	(+39)	324	(+56)	348 (+80)
2750	271	313	(+42)	331	(+60)	353 (+82)
2850	276	320	(+44)	340	(+64)	366 (+90)
2900	279	322	(+43)	343	(+64)	370 (+91)
3000	289	324	(+35)	347	(+58)	375 (+86)
3050	293	324	(+31)	349	(+56)	377 (+84)
3200	302	318	(+16)	342	(+40)	375 (+73)
3250	302	318	(+16)	340	(+38)	372 (+70)
3350	243	291	(+48)	310	(+67)	355 (+112)

RPM	Torque					
	Factory	Hypertech Stage 1		Hypertech Stage 2		Hypertech Stage 3
	Torque	Torque	(Gain)	Torque	(Gain)	Torque (Gain)
1750	436	434	-(+2)	436	(+0)	438 (+2)
2000	525	532	(+7)	550	(+25)	558 (+33)
2250	538	585	(+47)	615	(+77)	642 (+104)
2350	541	589	(+48)	620	(+79)	668 (+127)
2500	534	592	(+58)	622	(+88)	690 (+156)
2700	520	597	(+77)	632	(+112)	680 (+160)
2750	518	596	(+78)	633	(+115)	676 (+158)
2850	508	591	(+83)	627	(+119)	672 (+164)
2900	506	585	(+79)	621	(+115)	667 (+161)
3000	506	567	(+61)	608	(+102)	657 (+151)
3050	504	559	(+55)	601	(+97)	651 (+147)
3200	495	521	(+26)	561	(+66)	617 (+122)
3250	486	515	(+29)	550	(+64)	600 (+114)
3350	382	457	(+75)	485	(+103)	558 (+176)

## Tuning Features

Three Selectable Performance Tunes  
Adjustable Top Speed Limiter for Most Available Speed Rated Tires

Reads, Displays, and Clears Diagnostic Trouble Codes (DTC's)  
Speedometer and Odometer Correction for Replacement Tire Sizes: 26"-36"



3215 Appling Rd., Bartlett, TN 38133 [www.Hypertech.com](http://www.Hypertech.com)  
(901) 385-1888 © Hypertech, Inc. 2007

Vehicle Tested: 2007 Chevrolet Silverado 2500  
Engine: 6.6L Duramax (LMM)  
Transmission: 6-Speed Automatic  
Gear Ratio: 3.73:1  
Tire Size: 245/75R16  
Test Date: 7/2/2007

Hypertech Part Number:  
Max Energy

**32003**